# **Digital Transistors (BRT)** R1 = 4.7 k $\Omega$ , R2 = 4.7 k $\Omega$

## NPN Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

#### Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### **MAXIMUM RATINGS** (T<sub>A</sub> = $25^{\circ}$ C)

Rating	Symbol	Max	Unit
Collector-Base Voltage	V <sub>CBO</sub>	50	Vdc
Collector-Emitter Voltage	V <sub>CEO</sub>	50	Vdc
Collector Current – Continuous	Ι <sub>C</sub>	100	mAdc
Input Forward Voltage	V <sub>IN(fwd)</sub>	30	Vdc
Input Reverse Voltage	V <sub>IN(rev)</sub>	10	Vdc


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




## **ON Semiconductor®**

www.onsemi.com





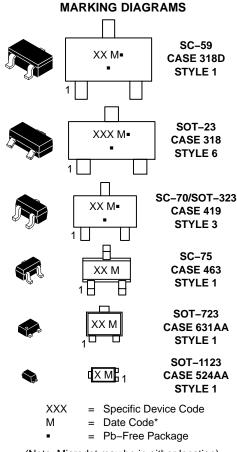

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**


See detailed ordering, marking, and shipping information in the package dimensions section on page 2 of this data sheet.

#### Table 1. ORDERING INFORMATION

Device	Part Marking	Package	Shipping <sup>†</sup>
MUN2232T1G, SMUN2232T1G*	8J	SC–59 (Pb–Free)	3000 / Tape & Reel
MMUN2232LT1G, NSVMMUN2232LT1G*	A8J	SOT-23 (Pb-Free)	3000 / Tape & Reel
NSVMMUN2232LT3G*	A8J	SOT-23 (Pb-Free)	10000 / Tape & Reel
MUN5232T1G, SMUN5232T1G*	8J	SC-70/SOT-323 (Pb-Free)	3000 / Tape & Reel
DTC143EET1G	8J	SC-75 (Pb-Free)	3000 / Tape & Reel
DTC143EM3T5G	8J	SOT-723 (Pb-Free)	8000 / Tape & Reel
NSBC143EF3T5G	Р	SOT-1123 (Pb-Free)	8000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable.



(2) SC-59; Minimum Pad
(3) SOT-23; Minimum Pad
(4) SOT-1123; 100 mm<sup>2</sup>, 1 oz. copper trace
(5) SOT-723; Minimum Pad

(1) SC-75 and SC-70/SOT323; Minimum Pad

Figure 1. Derating Curve

#### **Table 2. THERMAL CHARACTERISTICS**

	Characteristic	Symbol	Max	Unit
THERMAL CHARACTERISTIC	CS (SC–59) (MUN2232)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{C} (Note 2)	(Note 1)	PD	230 338 1.8 2.7	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	R <sub>θJA</sub>	540 370	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	R <sub>θJL</sub>	264 287	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SOT-23) (MMUN2232L)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{C} (Note 2)	(Note 1)	P <sub>D</sub>	246 400 2.0 3.2	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	508 311	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	R <sub>θJL</sub>	174 208	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SC–70/SOT–323) (MUN5232)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) (Note 2) Derate above 25^{\circ}C (Note 2)	(Note 1)	P <sub>D</sub>	202 310 1.6 2.5	m₩ m₩/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	R <sub>θJA</sub>	618 403	°C/W
Thermal Resistance, Junction to Lead (Note 2)	(Note 1)	R <sub>θJL</sub>	280 332	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SC-75) (DTC143EE)			
$\begin{array}{l} \mbox{Total Device Dissipation} \\ T_A = 25^\circ C \qquad (Note 1) \\ (Note 2) \\ \mbox{Derate above } 25^\circ C \\ (Note 2) \end{array}$	(Note 1)	PD	200 300 1.6 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	600 400	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
THERMAL CHARACTERISTIC	CS (SOT-723) (DTC143EM3)			
$\begin{array}{l} \mbox{Total Device Dissipation} \\ T_A = 25^\circ C \qquad (Note 1) \\ (Note 2) \\ \mbox{Derate above } 25^\circ C \\ (Note 2) \end{array}$	(Note 1)	PD	260 600 2.0 4.8	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ heta JA}$	480 205	°C/W
Junction and Storage Temper	ature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C
1. FR-4 @ Minimum Pad.		•		

FR-4 @ 1.0 x 1.0 Inch Pad.
 FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
 FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

#### **Table 2. THERMAL CHARACTERISTICS**

Characteristic	Symbol	Max	Unit
THERMAL CHARACTERISTICS (SOT-1123) (NSBC143EF3)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 3) (Note 4) Derate above 25^{\circ}C (Note 3) (Note 4)	PD	254 297 2.0 2.4	mW mW/°C
Thermal Resistance,(Note 3)Junction to Ambient(Note 4)	R <sub>θJA</sub>	493 421	°C/W
Thermal Resistance, Junction to Lead (Note 3)	R <sub>θJL</sub>	193	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C


1. FR-4 @ Minimum Pad.

FR-4 @ 1.0 x 1.0 Inch Pad.
 FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air.
 FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.


#### Table 3. ELECTRICAL CHARACTERISTICS ( $T_A = 25^{\circ}C$ , unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS					
Collector–Base Cutoff Current ( $V_{CB} = 50 \text{ V}, I_E = 0$ )	I <sub>CBO</sub>	_	_	100	nAdc
Collector–Emitter Cutoff Current $(V_{CE} = 50 \text{ V}, I_B = 0)$	I <sub>CEO</sub>	_	_	500	nAdc
Emitter–Base Cutoff Current ( $V_{EB} = 6.0 \text{ V}, I_C = 0$ )	I <sub>EBO</sub>	_	_	1.5	mAdc
Collector–Base Breakdown Voltage $(I_C = 10 \ \mu A, I_E = 0)$	V <sub>(BR)CBO</sub>	50	_	-	Vdc
Collector–Emitter Breakdown Voltage (Note 5) $(I_C = 2.0 \text{ mA}, I_B = 0)$	V <sub>(BR)CEO</sub>	50	_	-	Vdc
ON CHARACTERISTICS					
DC Current Gain (Note 5) ( $I_C = 5.0 \text{ mA}, V_{CE} = 10 \text{ V}$ )	h <sub>FE</sub>	15	30	_	
Collector–Emitter Saturation Voltage (Note 5) $(I_C = 10 \text{ mA}, I_B = 1.0 \text{ mA})$	V <sub>CE(sat)</sub>	_	_	0.25	Vdc
Input Voltage (off) ( $V_{CE} = 5.0 \text{ V}, I_C = 100 \mu\text{A}$ )	V <sub>i(off)</sub>	_	1.2	0.5	Vdc
Input Voltage (on) ( $V_{CE} = 0.3 \text{ V}, I_{C} = 20 \text{ mA}$ )	V <sub>i(on)</sub>	2.5	2.0	_	Vdc
Output Voltage (on) (V <sub>CC</sub> = 5.0 V, V <sub>B</sub> = 2.5 V, R <sub>L</sub> = 1.0 k $\Omega$ )	V <sub>OL</sub>	_	_	0.2	Vdc
Output Voltage (off) ( $V_{CC}$ = 5.0 V, $V_B$ = 0.25 V, $R_L$ = 1.0 k $\Omega$ )	V <sub>OH</sub>	4.9	_	-	Vdc
Input Resistor	R1	3.3	4.7	6.1	kΩ
Resistor Ratio	R <sub>1</sub> /R <sub>2</sub>	0.8	1.0	1.2	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 5. Pulsed Condition: Pulse Width = 300 msec, Duty Cycle  $\leq 2\%$ .

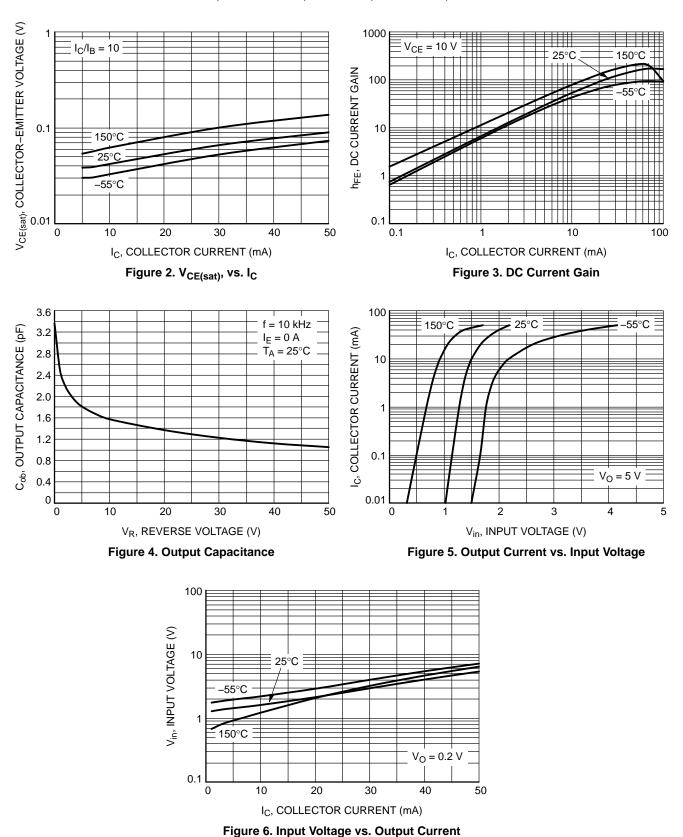

TYPICAL CHARACTERISTICS MUN2232, MMUN2232L, MUN5232, DTC143EE, DTC143EM3

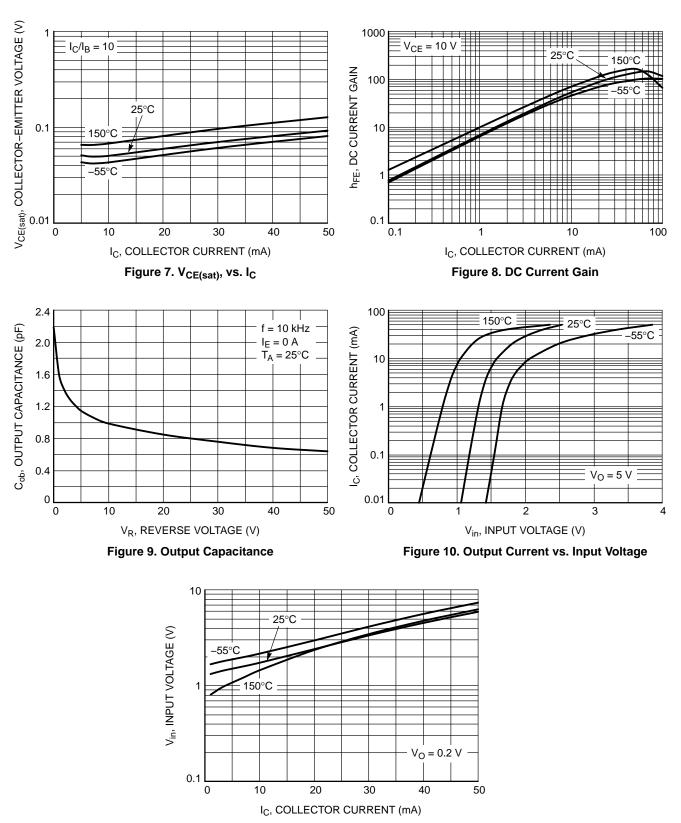

**TYPICAL CHARACTERISTICS – NSBC143EF3** 

Figure 11. Input Voltage vs. Output Current





© Semiconductor Components Industries, LLC, 2019






SCALE 2:1



#### **SOLDERING FOOTPRINT\***

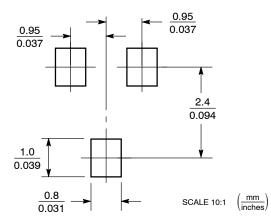

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

SC-59 CASE 318D-04 ISSUE H

DATE 28 JUN 2012

NOTES:

DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 CONTROLLING DIMENSION: MILLIMETER.

	м	ILLIMETE	RS		INCHES	
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	1.00	1.15	1.30	0.039	0.045	0.051
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.35	0.43	0.50	0.014	0.017	0.020
С	0.09	0.14	0.18	0.003	0.005	0.007
D	2.70	2.90	3.10	0.106	0.114	0.122
E	1.30	1.50	1.70	0.051	0.059	0.067
е	1.70	1.90	2.10	0.067	0.075	0.083
L	0.20	0.40	0.60	0.008	0.016	0.024
HE	2.50	2.80	3.00	0.099	0.110	0.118

#### GENERIC **MARKING DIAGRAM**



= Specific Device Code XXX Μ = Date Code

= Pb-Free Package\*


(\*Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present.

STYLE 1:	STYLE 2:	STYLE 3:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE
2. EMITTER	2. N.C.	2. ANODE
3. COLLECTOR	3. CATHODE	3. CATHODE
Style 4:	Style 5:	STYLE 6:
Pin 1. Cathode	Pin 1. Cathode	PIN 1. ANODE
2. n.C.	2. Cathode	2. CATHODE
3. Anode	3. Anode	3. ANODE/CATHODE

DOCUMENT NUMBER:	98ASB42664B	B42664B         Electronic versions are uncontrolled except when accessed directly from the Document Repos           Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-59		PAGE 1 OF 1	
the suitability of its products for any pa	articular purpose, nor does ON Semiconducto	stries, LLC dba ON Semiconductor or its subsidiaries in the United States y products herein. ON Semiconductor makes no warranty, representation r assume any liability arising out of the application or use of any product of cidental damages. ON Semiconductor does not convey any license under	r circuit, and specifically	



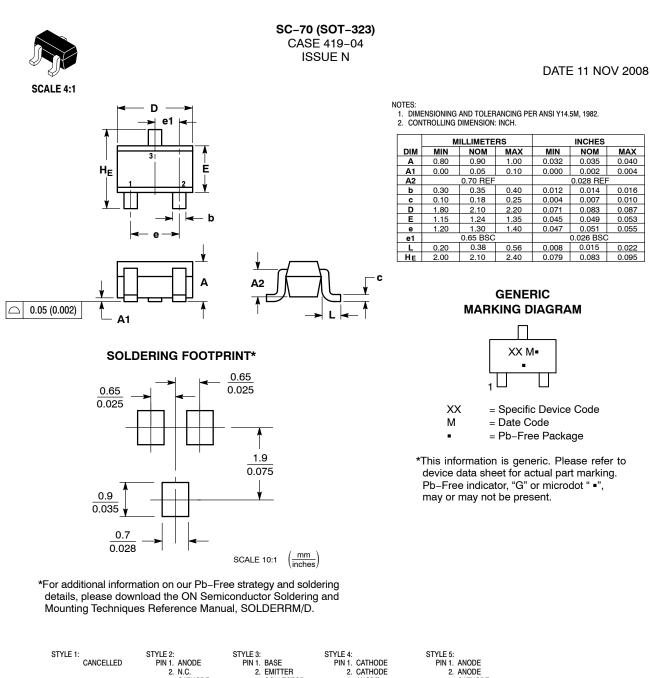

	3. CATHODE	3. COLLECTOR	3. ANODE	3. CATHODE	
STYLE 6:	STYLE 7:	STYLE 8:	STYLE 9:	STYLE 10:	STYLE 11:
PIN 1. EMITTER	Pin 1. Base	PIN 1. GATE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. CATHODE
2. BASE	2. Emitter	2. SOURCE	2. CATHODE	2. ANODE	2. CATHODE
3. COLLECTOR	3. Collector	3. DRAIN	3. CATHODE-ANODE	3. ANODE-CATHODE	3. CATHODE

DOCUMENT NUMBER:	98ASB42819B	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-70 (SOT-323)	-	PAGE 1 OF 1	

ON Semiconductor and unarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights or the rights of others.

© Semiconductor Components Industries, LLC, 2019





\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

1.000

0.039

SCALE 10:1

mm

inches

0.508

0.020

 
 DOCUMENT NUMBER:
 98ASB15184C
 Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

 DESCRIPTION:
 SC-75/SOT-416
 PAGE 1 OF 1


 ON Semiconductor and (iii) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its pattern rights nor the

rights of others.







SCALE 8:1




SOT-1123 CASE 524AA **ISSUE C** 



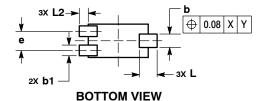

#### SOLDERING FOOTPRINT\*



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLE 1:	STYLE 2:	STYLE 3:	STYLE 4:	STYLE 5:
PIN 1. BASE	PIN 1. ANODE	PIN 1. ANODE	PIN 1. CATHODE	PIN 1. GATE
2. EMITTER	2. N/C	2. ANODE	2. CATHODE	2. SOURCE
3. COLLECTOR	3. CATHODE	3. CATHODE	3. ANODE	3. DRAIN

DOCUMENT NUMBER:	98AON23134D Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SOT-1123, 3-LEAD, 1.0X0.6X0.37, 0.35P		PAGE 1 OF 1		
ON Semiconductor and image trademarks of Semiconductor Components Industries 11 C dba ON Semiconductor or its subsidiaries in the United States and/or other countries					

on Semiconductor are verse the right to make changes without further notice to any products herein. ON Semiconductor in makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

DATE 29 NOV 2011

- NOTES:
- NOTES: 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994. 2. CONTROLLING DIMENSION: MILLIMETERS. 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE
- MINIMUM THICKNESS OF BASE MATERIAL. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. 4.

	MILLIMETERS	
DIM	MIN	MAX
Α	0.34	0.40
b	0.15	0.28
b1	0.10	0.20
С	0.07	0.17
D	0.75	0.85
Е	0.55	0.65
е	0.35	0.40
HE	0.95	1.05
L	0.185 REF	
L2	0.05	0.15

GENERIC **MARKING DIAGRAM\*** 


= Specific Device Code Х Μ = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking.

Pb-Free indicator, "G" or microdot " .", may or may not be present.

© Semiconductor Components Industries, LLC, 2019



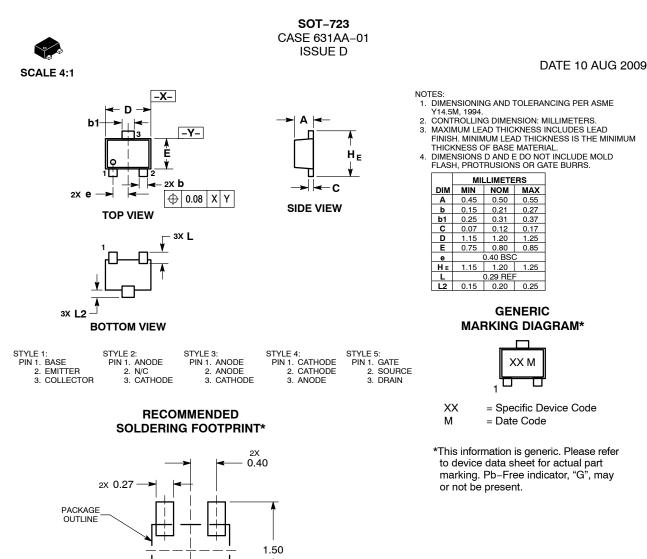

3X 0.52 - - 0.36 DIMENSIONS: MILLIMETERS

\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

 
 DOCUMENT NUMBER:
 98AON12989D
 Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

 DESCRIPTION:
 SOT-723
 PAGE 1 OF 1

 ON Semiconductor and ON semiconductor components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor houteds for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative